


TECHNICAL SHEET INVISACTA IN235

Concealed hinge for flush doors

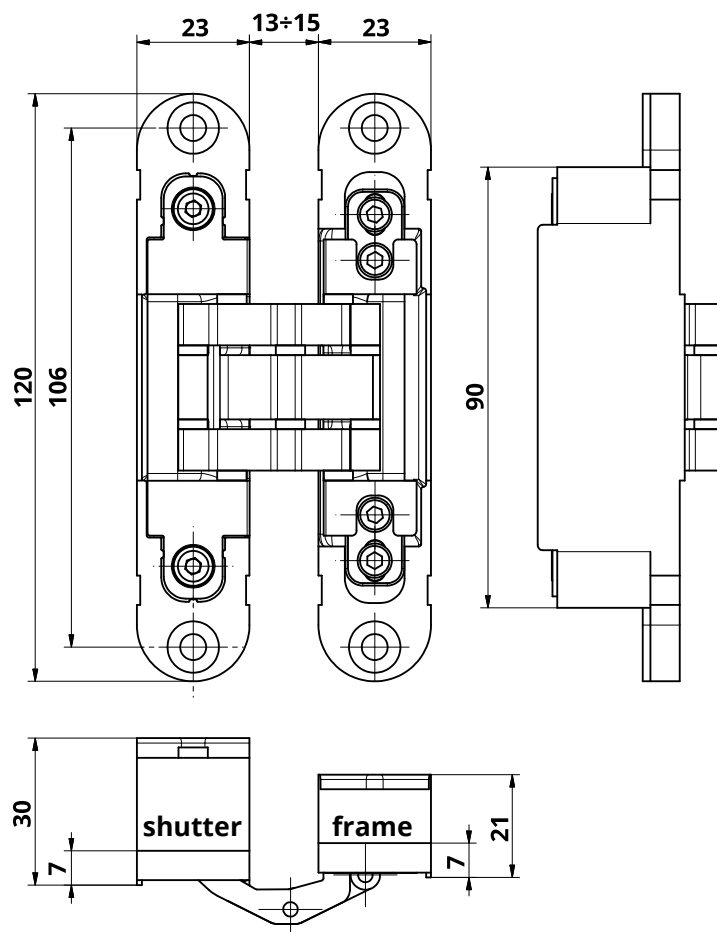

Technical features

- The hinge is suitable to be installed on doors and frames in wood and aluminium
- Material of hinge: zamak.
- Material of casing: thermoplastic polymer.
- Aluminum caps available to conceal the screws.
- The hinge can be fitted right and left.
- Movement on 7 junction fulcrums equipped with bearing in plastic HT with high resistance and long life.
- Equipped with 3-way adjustments that can be settled by means of just one 3 mm hex-spanner.
- Compatible with millings of IN230 and IN232 hinges.

Technical data

Capacity*	40 Kg.
Hinge height	120 mm
width shutter side	23 mm
width frame side	23 mm
Depth shutter side	30 mm
Depth frame side	21 mm
Door opening angle	180°
Side adjustment	± 1 mm
Height adjustment	± 2 mm
Depth adjustment	± 1 mm

* Tested with 90x210 cm doors - For more information on the number of hinges to be used according to the weight and dimension of the door, please see the loading charts available on the website www.otlav.it.

Accessories

Aluminium jig	MU230120G002
Nylon jig	MUINV500G004
Door alignment device	AI230120
Caps GC230010	<i>Same finishing than hinges</i>
Fixing plate	NP120040H504

Finishing

The entered images are only on illustrative purpose.
Features and colours may differ from what represented.

IN235120V704

Satinized silver
plated

IN235120H006

Zinc plated

IN235120VN04


Satinized Nickel Plated

IN2351209P14

White matt RAL9016




Milling on the shutter

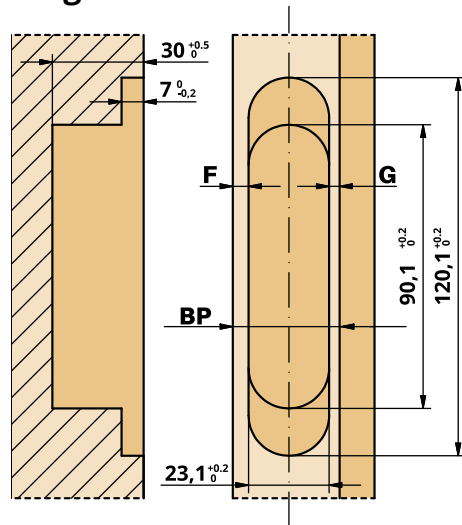

mm

BP	F	G
30	4	3
31	4	4
32	4	5
33	4	6
34	4	7
35	4	8
36	4	9
37	4	10
38	4	11
39	4	12
40	4	13

Milling on the frame

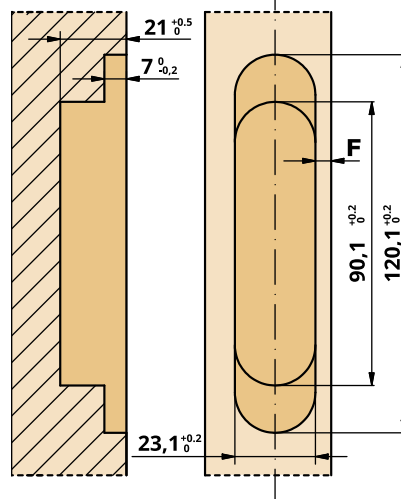

Caps

