


## TECHNICAL SHEET INVISACTA IN301

*Concealed hinge for flush doors*

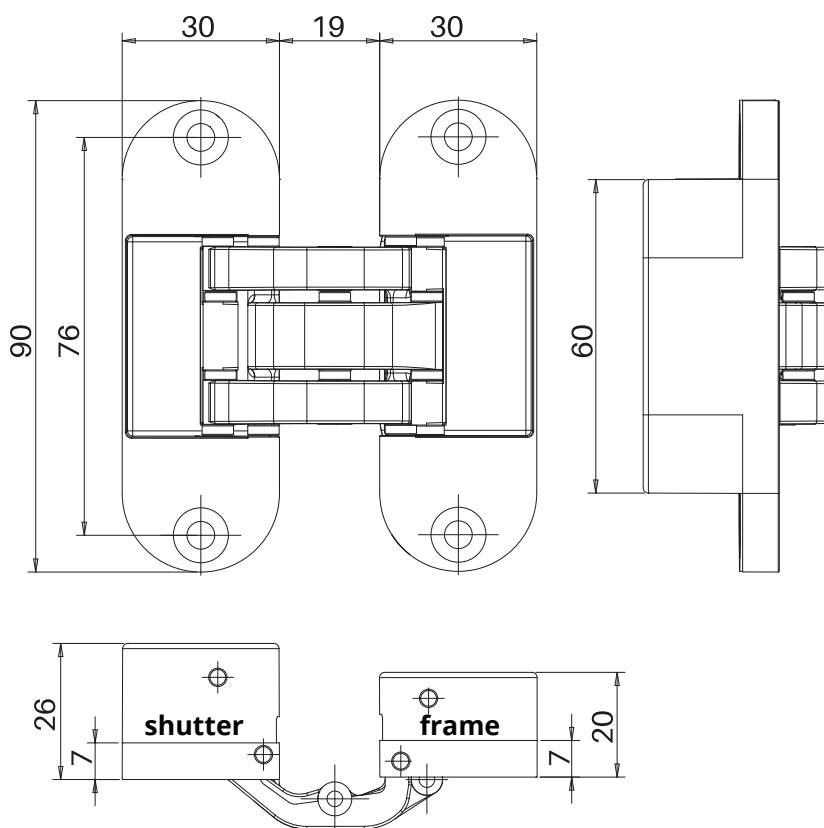

### Technical features

- The hinge is suitable to be installed on doors and frames in wood and aluminium
- Material of hinge: ZAMAK.
- The hinge can be fitted right and left and grants the reversibility of the door, both on vertical and horizontal axis.
- Movement on 7 junction fulcrums equipped with bearing in plastic HT with high resistance and long life.
- Packed in boxes of 18 pcs each.
- Patented EP-B- 2719851.

### Finishing

The entered images are only on illustrative purpose. Features and colours may differ from what represented. Other finishing on demand.

**IN301090V702**  
Satinized silver plated



### Technical data

Capacity*	40 Kg.
Hinge height	90 mm
width shutter side	30 mm
width frame side	30 mm
Depth shutter side	26 mm
Depth shutter frame	20 mm
Door opening angle	180°

\* Tested with 90x210 cm doors - For more information on the number of hinges to be used according to the weight and dimension of the door, please see the loading charts available on the website [www.otlav.it](http://www.otlav.it).