


TECHNICAL SHEET INVISACTA IN343

Concealed hinge for heavy doors

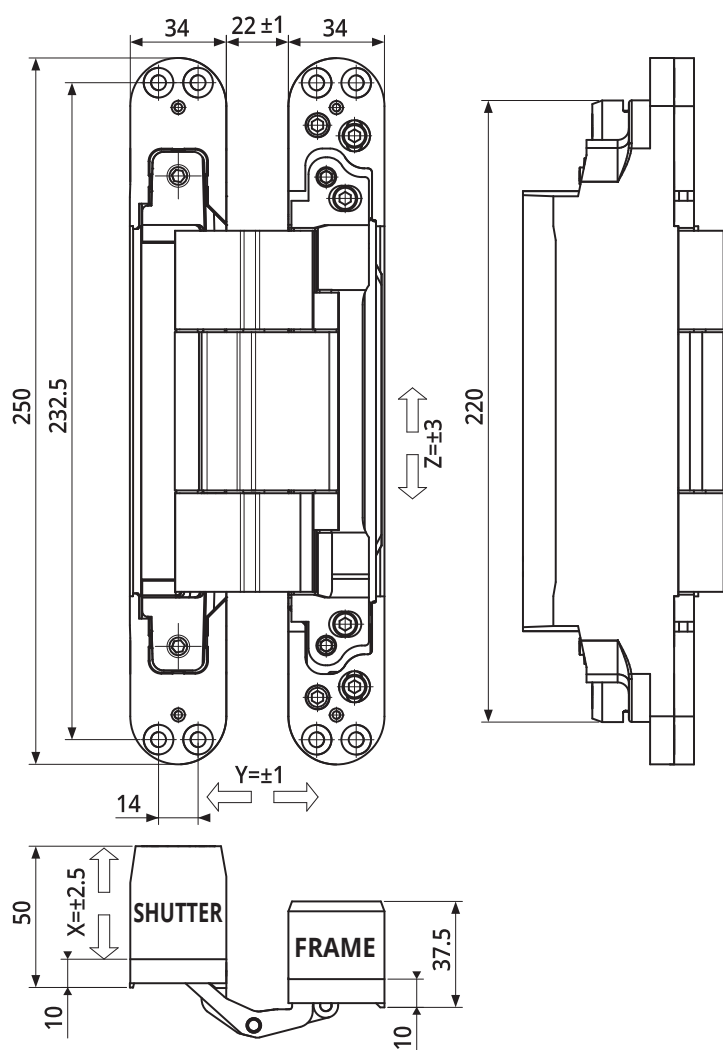

Technical features

- Movement on 7 junction fulcrums equipped with bearing in plastic HT with high resistance and long life.
- Equipped with 3-way progressive adjustment that can be settled by means of just one 4 mm hex-spanner. Once installed, the door has natural sinking, Invisacta hinge allows to set the door back to the start position.
- Equipped with a safety device for height adjustment.
- Outer casings protect the inner junction fulcrums against rubble coming from door installation works.
- The clamping screws, placed in the outer casings, are not used for hinge adjustment, therefore they remain stable for a long time.
- Reversible
- Material of levers: aluminum.
- Material of casing: zamak.
- Caps available to conceal the screws.

Technical data

Capacity*	200 Kg
Hinge height	250 mm
Width shutter side	34 mm
Width frame side	34 mm
Depth shutter side	55 mm
Depth frame side	37,5 mm
Door opening angle	180°
Side adjustment	± 2,5 mm
Height adjustment	± 3 mm
Depth adjustment	± 1 mm

* Tested with 90x210 cm doors - For more information on the number of hinges to be used according to the weight and dimension of the door, please see the loading charts available on the website www.otlav.it.